TEKNOLED
/кCdzŜyűŜ ŘŜf wŜl·f pp . !Wh π oонлф π Dλ2ѕy΄π ! ăűdzWλl·ă π {LJl·λy΄
Tel: фуп му лт тс π спппннпуну
λy΄f2 Ϫ űŜ]y΄2fŜŘ¢Ŝă
ǿǿǿ¢űŜ]y΄2fŜŘ¢Ŝă

Version：01

	Product Name	30W t2fŜ LED Street Light	
	Item No.	¢Yπth[9-030	
Optical Data			
LED Type	Nichia SMD	CCT	3000K, 4000K, 5000K
System Efficacy	130(±5%)LM/W(4000K Ra70)	CRI	Ra70, Ra80
Luminous Flux	3900(±5%)LM(4000K Ra70)	Beam Angle	/dzăű2Y΄
Electrical Data			
Power Supply	Mean Well	Power Frequency	50/60Hz
Input Voltage	AC100-240V / AC100-277V	Power Factor	>0.90
Input Surge Protection	6kV line-line, 10kV line-earth		
Others			
System Power Consumption	30±3W	Storage Temperature	-40°C to +70°C(-40°F to +158°F)
Housing	Aluminum Alloy	Operating Temperature	-30°C to +50°C(-22°F to +122°F)
Ingress Protection	IP66	Operating Humidity	15-90%RH
LED Life Span	>50000Hrs(Ta=30°C@LM70)	Luminaire Net Weight	8.5±0.3kg (18.74±0.66Lbs)
Outlook Dimensions	763x352x167mm (30.04"×13.86"×6.57")	Export Carton Size	790x390x150mm (31.1"×15.35"×5.91")
Protection Class	Class I		
Certification			
Optional Info.			
Installation Method	Pole Mounting (Adjustable Angle)		
Intelligent Control	Daylight Control(On/Off) / Time Control		

Physical Dimensions

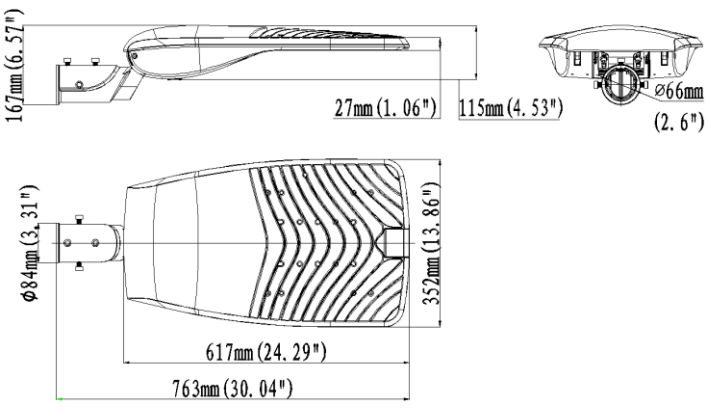
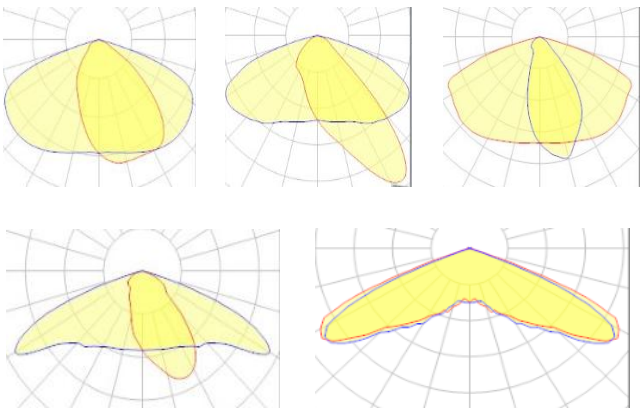
Light Distribution Curve