



## High Efficiency High Quality Cost-effective


It is designed to be qualified for yours special requirement. Most importantly, the price is very competitive.

## Asymmetrical Light Distribution

Asymmetrical light distribution for better light directionality in applications such as tennis courts, basketball courts, volleyball, etc.

## Useful light

Adopting polarized light design with minimized light pollution and light loss.

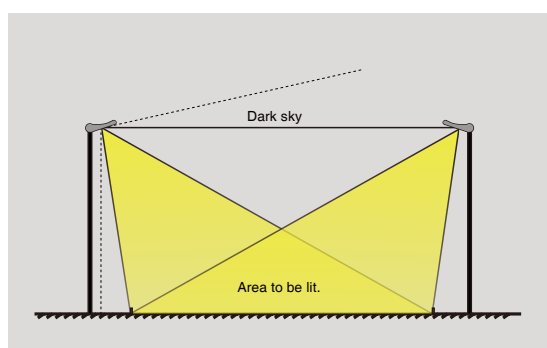

## IP66 & IK08


Optic structure adopts PC lens and tempered glass with IK08 and IP66 protection rating.

## Vent

Balance atmosphere pressure and prevent moisture.

## Wire Guard Compatible

As we know, sometimes, customers would better choose tempered glass cover. And what customers may worry is fragility. However, there is wire guard to protect it.

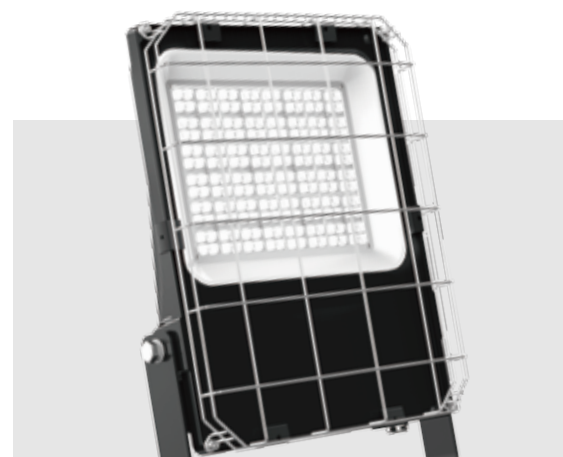

## Different Watt Different Dimensions



## Dimensions

	50W	
Luminaire Net Weight	2.3±0.3kg (5.07±0.66Lbs)	
Outlook Dimensions	302×240×63mm(11.89"×9.45"×2.48")	
Export Carton Size	350×105×280mm (13.78"×4.13"×11.02")	
	100W	150W
Luminaire Net Weight	3.9±0.3kg (8.6±0.66Lbs)	4.7±0.3kg (10.36±0.66Lbs)
Outlook Dimensions	390×332×77mm (15.35"×13.07"×3.03")	433×328×77mm (17.05"×12.91"×3.03")
Export Carton Size	445×120×370mm (17.52"×4.72"×14.57")	498×130×365mm (19.61"×5.12"×14.37")
	200W	300W
Luminaire Net Weight	6.0±0.3kg (13.23±0.66Lbs)	8.2±0.3kg (18.08±0.66Lbs)
Outlook Dimensions	471×395×87mm (18.54"×15.55"×3.43")	538×465×96mm (21.18"×18.31"×3.78")
Export Carton Size	545×140×430mm (21.46"×5.51"×16.93")	622×160×510mm (24.49"×6.3"×20.08")

