	Product Name	200W ° LED Flood Light
	Item No.	° k-V ° -200

Optical Data

LED Type	SEOUL SMD	CCT	4000K, 5000K
System Efficacy	135(±5%)lm/w(5000K Ra70)	CRI	Ra70, Ra80, Ra90
, Luminous Flux	27000(±5%)LM(5000K Ra70)		

Electrical Data

Power Supply	Mean Well	Power Frequency	50/60Hz
Input Voltage	AC100-240V / AC100-277V	Power Factor	>0.92
Input Surge Protection	6kV line-line, 10kV line-earth		


Others

System Power Consumption	200±10W	Storage Temperature	-40°C to +70°C(-40°F to +158°F)
Housing	Aluminum Alloy	Operating Temperature	-30°C to +40°C(-22°F to +104°F)
Ingress Protection	IP65	Operating Humidity	15-90%RH
LED Life Span	>50,000Hrs(Ta=30°C@L70)	Luminaire Net Weight	3.7±0.3kg (8.16±0.66Lbs)
Outlook Dimensions	321×315×106mm (12.64"×12.4"×4.17")	Export Carton Size	370×150×365mm (14.57"×5.91"×14.37")
Protection Class	Class I		
Certification			

Optional Info.

Installation Method	Bracket Mounting
Intelligent Control	DALI Control

Physical Dimensions

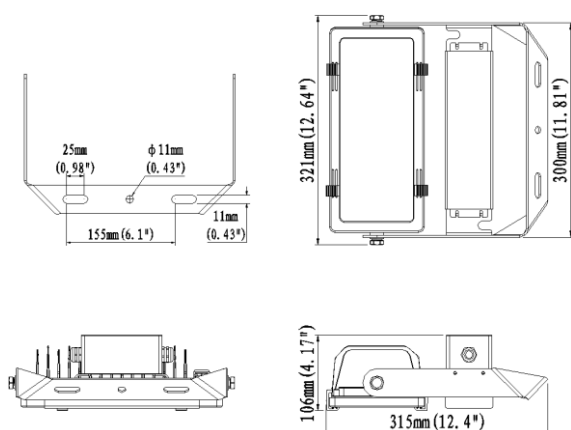

Light Distribution Curve

